



29-116 kW

YTP-4G SERIES

Half Cylindrical - Pipe + Header System - 4 Pass
Central System Heating Boiler

USAGE AREAS

Mass Housing Heating

FUEL TYPES

Pellet, Pomace, Hazelnut Charcoal, Brass Coal


TECHNICAL DATA >>>

YTP-4G SERIES • 116-581 kW

Half Cylindrical - Pipe + Header System - 4 Pass Central System Boiler



YTP-4G SERIES • 116-581 kW



4 PASS
TECHNOLOGY



POMACE



PELET



HAZELNUT COAL




BRASS COAL

- Multi-functional electronical control panel that is easy to use and elegant, increases safety and decrease consumption of electricity-fuel (100,000-250,000 kcal/h)
- Manual control panel that is easy to use, increases safety and decrease consumption of electricity-fuel (300,000-500.000 kcal).
- More heat transfer surface by pipe and baffle layers
- Adjustable fan valve helps adjust burn speed according to flue suction.
- High efficiency and cost saving with four-baffle conducted heat transfer surface and flue pipe.
- Large fuel tank (hopper) and fuel sieving system
- More productive combustion is obtained by means of primary and secondary air sytem with detachable and specially-designed casting ladle.
- Heat loss is minimized by using ceramic-based refractor on boiler's front covers and high-density insulation materials on the body's hot surfaces.
- The boiler can be cleaned easily by virtue of optional ash discharge system.
- Usage comfort is presented with the specially-designed and optional automatic ignition system.
- Our boilers are 4-pass. The operating pressure of the boilers is 3 bar.

TECHNICAL DATA

Data in technical tables may change within the scope of product development.

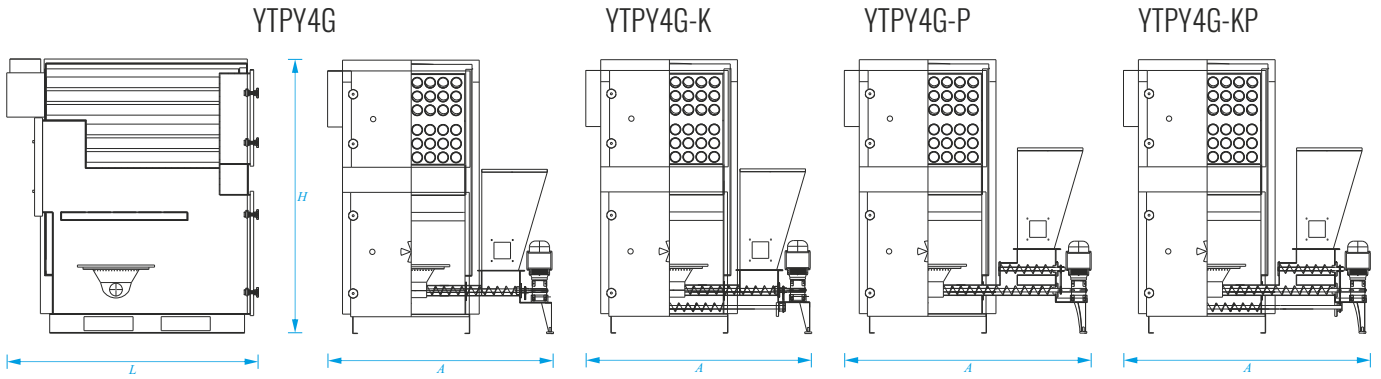

DIMENSIONS			YTP-4G																	
			100		150		180		200		250		300		350		400		450	
YTP-4G	Width (A)	mm	1.600										1.740				1.920			
YTP-4G-K	Width (A)	mm	1.850										1.990				2.170			
YTP-4G-P	Width (A)	mm	1.600										1.740				1.920			
YTP-4G-KP	Width (A)	mm	1.850										1.990				2.170			
Length (L)		mm	1.350		1.650		1.700		1.800				1.950		2.350		2.550		2.650	
Height (H)		mm	1.700				1.870		1.950											

TECHNICAL DATA		YTP-4G										
		100	150	180	200	250	300	350	400	450	500	
Fuel Type Used	mm	Olive Core - Pomace - Pellet - Hazelnut Charcoal - Rice Charcoal										
Heating Power	kW	116	175	209	232	290	348	406	465	581	523	
	Kcal	100.000	150.000	180.000	200.000	250.000	300.000	350.000	400.000	450.000	500.000	
Combustion Pot Dimensions	mm	340 x 385					435 x 445		550 x 555			
Fuel Capacity (Pomace - Pellet)	kg	95				125	135					
Water Volume	lt	216	293	340	367	380	420	465	600	695	735	
Boiler weight	kg	580	945	1.310	1.395	1.455	1.532	1.655	2.050	2.340	2.630	
Bacadan istenilen Çekiş	mbar	0.25 - 0.28	0.31 - 0.33	0.33 - 0.35	0.35 - 0.40		0.42 - 0.45					
Temperature Range	°C	40-85										
Minimum / Maximum Working Pressure	bar	3										
Test Pressure	bar	4.5										
Flue Diameter	Ø mm	300 x 200					300 x 250				500 x 250	
Min. / Max. Flue Temp	°C	170 - 210										
Boiler Input-Output	DN	1 ½	2		3		4	5				
Expansion Tank Input / Output	Ø inç	1					1¼					
Boiler Loading-Unloading	Ø inç	1/2									1	
Electrical Connection	V/Hz	220V - 50Hz			380V - 50Hz							





**Bahçelievler, Bağımsızlık Cd. No:18
35875 • Torbalı, İzmir, Türkiye**

+90 232 462 35 15 • +90 232 486 12 18
+90 533 479 51 27



Technical Support

servis@yagmurteknik.com
+90 534 052 40 34



export@yagmurteknik.com
www.yagmurteknik.com



export@yagmurteknik.com
www.yagmurteknik.com



yağmur teknik
let the expert do the job